



NOTE:
GENERAL CONTRACTOR AND OTHER
TO VERIFY ALL DIMENSIONS AND
SPECIFICATIONS PRIOR TO CONSTRUCTION.




CONCRETE REINFORCING
REINFORCING CONCRETE, CONTAINING STEEL REINFORCING, SHALL BE 3000 PSI STRENGTH CONCRETE. ALL REINFORCING SHALL BE #4 BARS. ALL REINFORCING SHALL BE PLACED AS SHOWN ON THIS DRAWING. ALL REINFORCING SHALL BE PLACED IN ACCORDANCE WITH THE FOLLOWING NOTES:



CONCRECTION TABLE

SECTION	CONCRETE	REINFORCING	FINISH
FOUNDATION	3000 PSI	#4 BARS	FORM FINISH
WALLS	3000 PSI	#4 BARS	FORM FINISH
FLOOR	3000 PSI	#4 BARS	FORM FINISH
ROOF	3000 PSI	#4 BARS	FORM FINISH

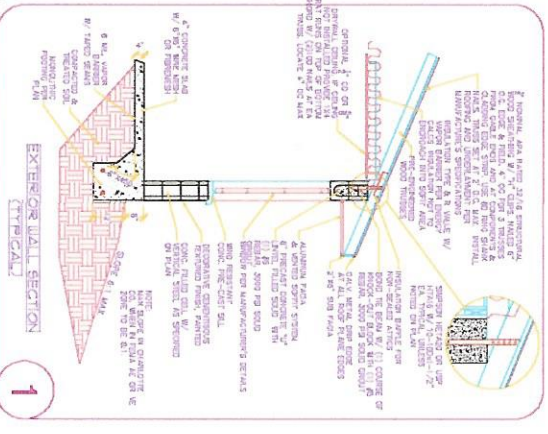

RIGHT ELEVATION
SCALE: 1/4" = 1'-0"

REAR ELEVATION
SCALE: 1/4" = 1'-0"

LEFT ELEVATION
SCALE: 1/4" = 1'-0"

FRONT ELEVATION
SCALE: 1/4" = 1'-0"



DESIGN CRITERIA
FOUNDATION: 3000 PSI CONCRETE WITH #4 REINFORCING. WALLS: 3000 PSI CONCRETE WITH #4 REINFORCING. FLOOR: 3000 PSI CONCRETE WITH #4 REINFORCING. ROOF: 3000 PSI CONCRETE WITH #4 REINFORCING.

FOUNDATION PLAN
SCALE: 1/4" = 1'-0"

FOUNDATION NOTES:
1. FOUNDATION SHALL BE 3000 PSI CONCRETE WITH #4 REINFORCING.
2. FOUNDATION SHALL BE PLACED AS SHOWN ON THIS DRAWING.
3. FOUNDATION SHALL BE PLACED IN ACCORDANCE WITH THE FOLLOWING NOTES:

FLOOR PLAN
SCALE: 1/4" = 1'-0"

TOTAL AREA: 624 SF

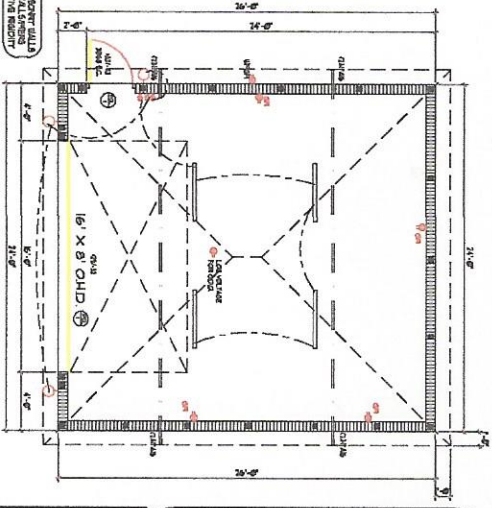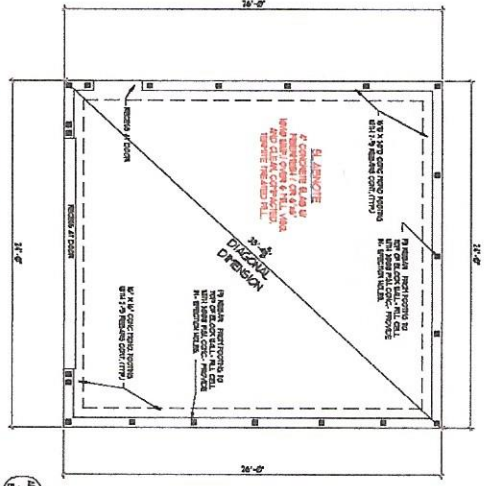

UNIQUE
DRAWING NO. 15
SHEET 1 OF 1

SNYDERS DRAFTING
1578 EL JOBEAN RD.
PORT CHARLOTTE, FL 33948
(941) 766-7977

PROPOSED GARAGE FOR:
BILL TOSH
2496 HIAWATHA ST. PORT CHARLOTTE

BUILDER
KR. BROBST BUILDER